


## TP-202MH Mini Hori



### Main Features:

- ▶ **Various applications**  
Suitable for fruit & vegetable boxes, concrete blocks, and pallets loaded with cardboard boxes containing any type of products.
  - ▶ **Adjustable Strapping Height**  
The strapping height is quickly and effortless adjustable. Allow to strap 19 cm from the floor up to 2 m.
  - ▶ **Control Panel on both sides**  
With the control panel on both sides of the machine, it is easy for operation.
  - ▶ **Easy to Change the Coil**  
The position of strap dispenser is ergonomic design. It's convenient and saves energy to change the coil of PP strap.
  - ▶ **Mobility**  
With big wheels mobility, it is easy to move around.
- Option**
- ▶ Battery power supply



### TP-202MH TECHNICAL DATA

Strap Type: PP straps  
Strap Width: 6 mm-15.5 mm  
Strap Tension: 15 kg-45 kg  
Net Weight: 260 kg  
Power: 110V, 220V, 230V 50/60Hz 1PH

All specifications subject to change without notice.

**TRANSPAK** TRANSPAK EQUIPMENT CORP.  
9F-4, NO.112, SEC. 2, CHUNG SHAN N. ROAD, TAIPEI 104, TAIWAN  
MAILING ADDRESS : P.O.BOX 68-1951, TAIPEI 104, TAIWAN  
TEL : (02) 2581 0126 FAX : 886 2 2562 9849  
WEB : www.transpakcorp.com E-mail : transpak@transpak.com.tw 04.2006x2000

# PALLET STRAPPING MACHINE

These semi-auto mobile pallet strapping machines eliminates manual tools and dispenser. They can be moved beside the load you want to strap and there is no need to move the stacked pallet. They can help you save time, reduce worker fatigue and provide cost effective solutions for low volume pallet strapping applications. In this category, we have three models to meet your different requirements:

TP-202MH

TP-601MV

TP-202MV



## Pallet Machine for Vertical Applications

Quick, ergonomic and economic solution for vertical pallet strapping

## TP-601MV Magic



### Main Features:



Patented Telescoped Gripper Track


To reduce floor space and chance of damage, the patented "Telescoped Gripper Track" automatically retracts inside the machine frame entirely when strapping cycle is complete.

Patent No.: US 6,994,019 B1  
DE 20 2004 016 641.0  
CN ZL 2004 2 0117667.1



Friction Weld Sealing

Friction weld sealing guarantees reliable joint and high seal efficiency for both PP and PET straps.

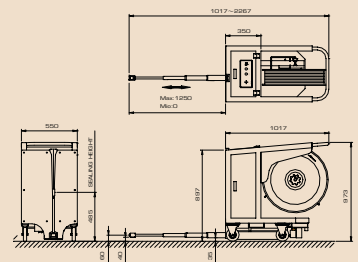

Electronic Tension Control

External adjustment of strap tension by the simple turn of a dial.

- ▶ **Dispenser with 406 mm core size**  
200 mm and 280 mm core as option
- ▶ **Weld-Cooling Timer**  
The weld cooling time may be increased to insure high joint efficiency seals even under high tension.

### TP-601MV TECHNICAL DATA

Strap Type: PP & PET straps  
Strap Width: 8 mm-15.5 mm  
Strap Tension: maximum 150 kg  
Net Weight: 200 kg  
Power: 110V, 220V, 230V 50/60Hz 1PH

## TP-202MV Mini Verti




### Main Features:

- ▶ **Mobility**  
With light weight and compact size, it is easy to move beside the pallet you want to strap.
- ▶ **Good for lower height pallet**  
Enables to strap pallet with height as low as 280 mm
- ▶ **Easy strap feeding**  
Handle is with feeding switch to feed the strap to the required length. User friendly.

**Option**

- ▶ Battery power supply

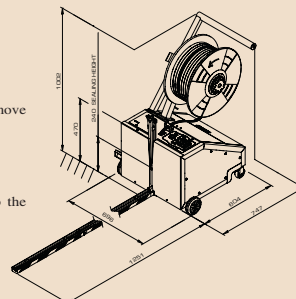

### TP-202MV TECHNICAL DATA

Strap Type: PP straps  
Strap Width: 9 mm-15.5 mm  
Strap Tension: 15 kg-45 kg  
Net Weight: 90 kg  
Power: 110V, 220V, 230V 50/60Hz 1PH